


N-00 SERIES

LOCKNUT DIMENSIONS

INCH DESIGN / FOR BALL BEARINGS AND
CYLINDRICAL, SPHERICAL AND TAPERED
ROLLER BEARINGS

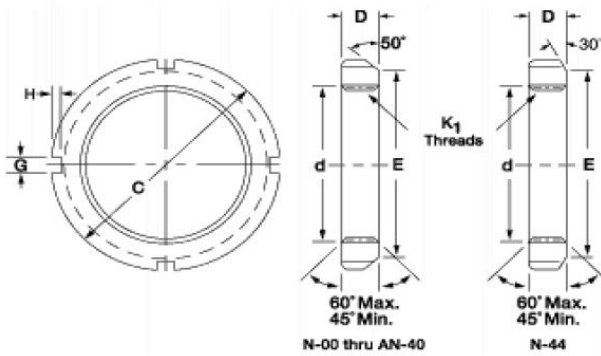


LOCKNUT NO.	THREADS		OUTSIDE DIA. C MAX	FACE DIA. E MAX	NUT WIDTH D MAX	SLOT WIDTH G MIN	SLOT DEPTH H MAX	FACE RUNOUT Sd MAX	APP. WT. LB/C
	MAJOR DIA. d	NO. PER IN. K1							
	MIN								
AN-17	3.340	12	4.411	4.031	.635	.360	.166	.004	104.0

N-00 SERIES

SHAFT DIMENSIONS

INCH DESIGN / FOR BALL BEARINGS AND
CYLINDRICAL, SPHERICAL AND TAPERED
ROLLER BEARINGS

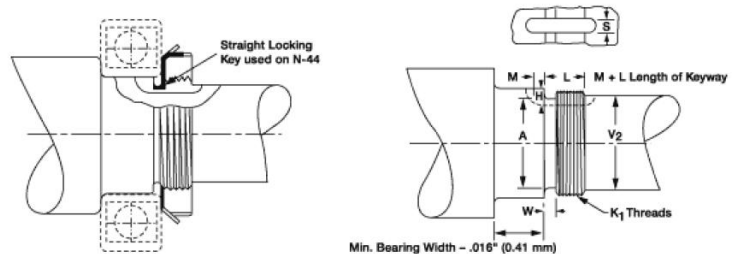

LOCKNUT NO.	BEARING BORE	V2 MAX	NO PER IN K1	MAJOR DIA. MAX	THREADS			RELIEF			KEYWAY		
					PITCH DIA. MAX	MINOR DIA. MAX	LENGTH L MAX	DIA. A MAX	WIDTH W MAX	DEPTH H MIN	WIDTH S MIN	M MIN	
AN-17	3.3456	3.188	12	3.340	3.2859	3.2378	.734	3.2165	.172	.125	.375	.250	