

Super Blue Ribbon® V-Belt



1 Cord

The cord is coated with a special compound that produces a secure, long-lasting bond with the surrounding rubber to assure longer life without separation problems. In addition, Blue Ribbon's dependable length stability means the belt requires significantly less re-tensioning and take-up.

2 Cover

The heavy-duty fabric cover not only protects the core; but its extra flexibility permits the belt to bend more easily around the smallest pulleys with far less strain on the fabric. It's a smoother running belt. Longer belt life results in less frequent replacement, less downtime and lower maintenance costs.

PLUS!

The Timken Ironclad Guarantee assures worry-free belt performance!

Recommended Sheaves:
Conventional – QD, Taper Bushed, or MST (A-B, C, D)

The finest wrapped belt
in the industry

Super rated at
standard prices

Longer life


chekmate®
matching

Applications:

- Mixers
- Pumps
- Conveyors
- HVAC
- Anything and
everything
& More

Heavy Duty V-Belts

Super Blue Ribbon® V-Belt

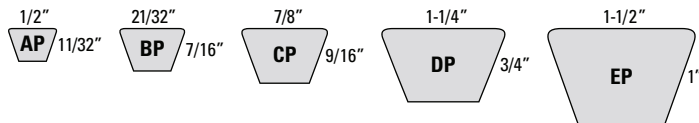


The finest wrapped belt in the industry and workhorse of classical v-belts.

Heavy-Duty Cover – Stress-relieved fabric cover flexes better than ordinary fabric to improve belt life, and assures a smooth transfer of power.

Super Blue's resistance to oil, heat, weather and aggressive environmental conditions is outstanding.

Super Blue Ribbon® v-belts operate within a wide range of load capacities and speeds – with rated performance from 100 to 8,000 RPM and horsepower capability from 1 to 1,100 horsepower.

Super Blue Ribbon is the ideal choice for dependable performance on an extremely wide range of applications – A, B, C, D, and E sections – single or multiple drive.

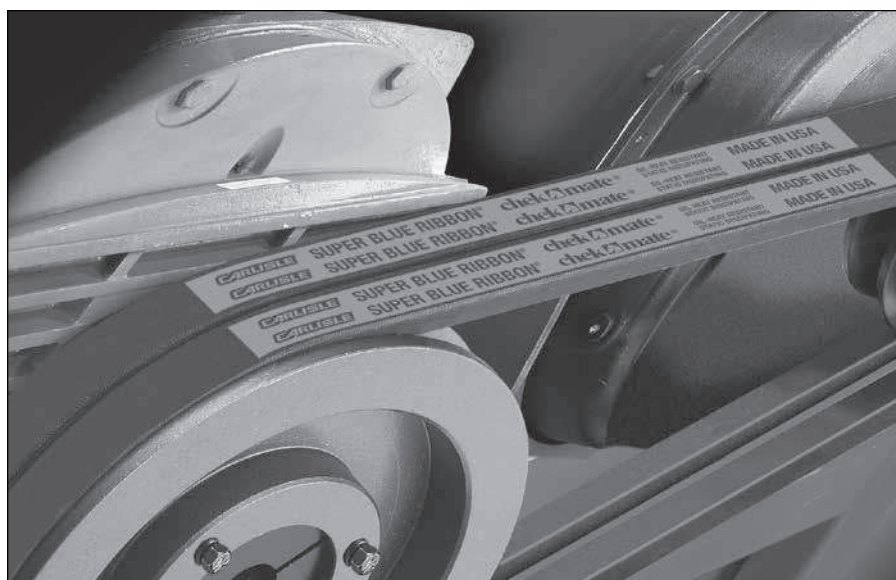

Super Blue Ribbon® V-Belt

Super Blue Ribbon® Part Numbers

Part Number Example: **AP50** = **A** **P** **50**
Cross Section Wrapped Molded Construction Inside Circumference (inches)

Part Number	Outside Circumference	Weight (lbs)
A Section – Recommended Sheaves: Conventional – OD, Taper Bushed, or MST (A-B)		
AP20	22.3	0.11
AP21	23.3	0.14
AP22	24.3	0.15
AP23	25.3	0.15
AP24	26.3	0.16
AP25	27.3	0.17
AP26	28.3	0.17
AP27	29.3	0.18
AP28	30.3	0.19
AP29	31.3	0.19
AP30	32.3	0.20
AP31	33.3	0.21
AP32	34.3	0.21
AP33	35.3	0.22
AP34	36.3	0.22
AP35	37.3	0.23
AP36	38.3	0.24
AP37	39.3	0.24
AP38	40.3	0.25
AP39	41.3	0.26
AP40	42.3	0.26
AP41	43.3	0.27
AP42	44.3	0.27
AP43	45.3	0.28
AP44	46.3	0.29
AP45	47.3	0.29
AP46	48.3	0.30
AP47	49.3	0.31
AP48	50.3	0.31
AP49	51.3	0.32
AP50	52.3	0.32
AP51	53.3	0.33
AP52	54.3	0.34

Part Number	Outside Circumference	Weight (lbs)
A Section – Recommended Sheaves: Conventional – OD, Taper Bushed, or MST (A-B)		
AP53	55.3	0.34
AP54	56.3	0.35
AP55	57.3	0.36
AP56	58.3	0.36
AP57	59.3	0.37
AP58	60.3	0.37
AP59	61.3	0.38
AP60	62.3	0.39
AP61	63.3	0.39
AP62	64.3	0.40
AP63	65.3	0.41
AP64	66.3	0.41
AP65	67.3	0.41
AP66	68.3	0.43
AP67	69.3	0.43
AP68	70.3	0.44
AP69	71.3	0.44
AP70	72.3	0.45
AP71	73.3	0.46
AP72	74.3	0.46
AP73	75.3	0.46
AP74	76.3	0.47
AP75	77.3	0.48
AP76	78.3	0.48
AP77	79.3	0.49
AP78	80.3	0.49
AP79	81.3	0.50
AP80	82.3	0.51
AP81	83.3	0.51
AP82	84.3	0.52
AP83	85.3	0.52
AP84	86.3	0.53
AP85	87.3	0.54

Heavy Duty V-Belts