

Super Blue Ribbon® V-Belt



1 Cord

The cord is coated with a special compound that produces a secure, long-lasting bond with the surrounding rubber to assure longer life without separation problems. In addition, Blue Ribbon's dependable length stability means the belt requires significantly less re-tensioning and take-up.

2 Cover

The heavy-duty fabric cover not only protects the core; but its extra flexibility permits the belt to bend more easily around the smallest pulleys with far less strain on the fabric. It's a smoother running belt. Longer belt life results in less frequent replacement, less downtime and lower maintenance costs.

PLUS!

The Timken Ironclad Guarantee assures worry-free belt performance!

Recommended Sheaves:
Conventional – QD, Taper Bushed, or MST (A-B, C, D)

The finest wrapped belt
in the industry

Super rated at
standard prices

Longer life


chekmate®
matching

Applications:

- Mixers
- Pumps
- Conveyors
- HVAC
- Anything and
everything
& More

Heavy Duty V-Belts

Super Blue Ribbon® V-Belt

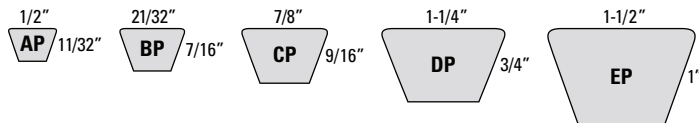


The finest wrapped belt in the industry and workhorse of classical v-belts.

Heavy-Duty Cover – Stress-relieved fabric cover flexes better than ordinary fabric to improve belt life, and assures a smooth transfer of power.

Super Blue's resistance to oil, heat, weather and aggressive environmental conditions is outstanding.

Super Blue Ribbon® v-belts operate within a wide range of load capacities and speeds – with rated performance from 100 to 8,000 RPM and horsepower capability from 1 to 1,100 horsepower.

Super Blue Ribbon is the ideal choice for dependable performance on an extremely wide range of applications – A, B, C, D, and E sections – single or multiple drive.

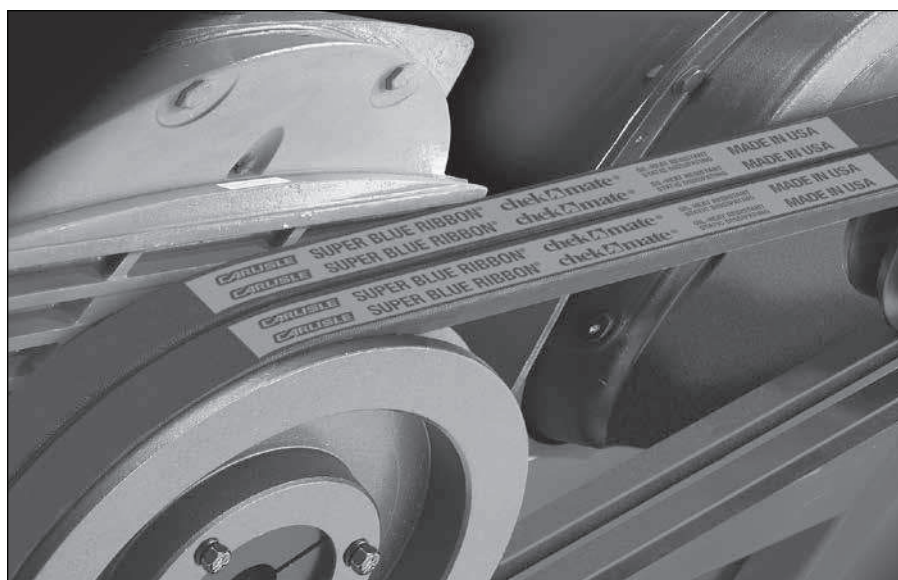

Super Blue Ribbon®

V-Belt

Super Blue Ribbon®

Part Numbers

Part Number	Outside Circumference	Weight (lbs)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
BP107	110.3	1.10
BP108	111.3	1.14
BP109	112.3	1.12
BP110	113.3	1.13
BP111	114.3	1.14
BP112	115.3	1.18
BP113	116.3	1.16
BP114	117.3	1.17
BP115	118.3	1.18
BP116	119.3	1.22
BP117	120.3	1.20
BP118	121.3	1.21
BP119	122.3	1.22
BP120	123.3	1.26
BP122	125.3	1.24
BP123	126.3	1.25
BP124	127.3	1.27
BP125	128.3	1.27
BP126	129.3	1.29
BP128	131.3	1.31
BP130	133.3	1.33
BP131	134.3	1.33
BP132	135.3	1.35
BP133	136.3	1.36
BP134	137.3	1.37
BP135	138.3	1.38
BP136	139.3	1.39
BP138	141.3	1.41
BP140	143.3	1.43
BP141	144.3	1.44
BP142	145.3	1.45
BP144	147.3	1.48
BP146	149.3	1.49

Part Number	Outside Circumference	Weight (lbs)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
BP148	151.3	1.51
BP150	153.3	1.53
BP151	154.3	1.54
BP152	155.3	1.55
BP154	157.3	1.57
BP156	159.3	1.59
BP157	160.3	1.60
BP158	161.3	1.61
BP160	163.3	1.64
BP161	164.3	1.65
BP162	165.3	1.66
BP164	167.3	1.68
BP165	168.3	1.69
BP168	171.3	1.72
BP170	173.3	1.74
BP172	175.3	1.76
BP173	176.3	1.77
BP175	178.3	1.79
BP176	179.3	1.80
BP180	183.3	1.84
BP182	185.3	1.86
BP184	187.3	1.88
BP190	193.3	1.94
BP191	194.3	1.95
BP195	198.3	1.99
BP198	201.3	2.02
BP203	206.3	2.05
BP205	208.3	2.07
BP210	213.3	2.12
BP214	217.3	2.16
BP217*	220.3	2.19
BP220	223.3	2.22
BP221	224.3	2.23