

# Super Blue Ribbon® V-Belt



## 1 Cord

The cord is coated with a special compound that produces a secure, long-lasting bond with the surrounding rubber to assure longer life without separation problems. In addition, Blue Ribbon's dependable length stability means the belt requires significantly less re-tensioning and take-up.

## 2 Cover

The heavy-duty fabric cover not only protects the core; but its extra flexibility permits the belt to bend more easily around the smallest pulleys with far less strain on the fabric. It's a smoother running belt. Longer belt life results in less frequent replacement, less downtime and lower maintenance costs.

## PLUS!

The Timken Ironclad Guarantee assures worry-free belt performance!

**Recommended Sheaves:**  
Conventional – QD, Taper Bushed, or MST (A-B, C, D)

The finest wrapped belt  
in the industry

Super rated at  
standard prices

Longer life


**chekmate®**  
matching

Applications:

- Mixers
- Pumps
- Conveyors
- HVAC
- Anything and  
everything  
& More

Heavy Duty V-Belts

# Super Blue Ribbon® V-Belt

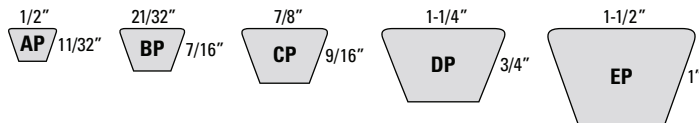


**The finest wrapped belt in the industry and workhorse of classical v-belts.**

**Heavy-Duty Cover** – Stress-relieved fabric cover flexes better than ordinary fabric to improve belt life, and assures a smooth transfer of power.

Super Blue's resistance to oil, heat, weather and aggressive environmental conditions is outstanding.

Super Blue Ribbon® v-belts operate within a wide range of load capacities and speeds – with rated performance from 100 to 8,000 RPM and horsepower capability from 1 to 1,100 horsepower.

Super Blue Ribbon is the ideal choice for dependable performance on an extremely wide range of applications – A, B, C, D, and E sections – single or multiple drive.

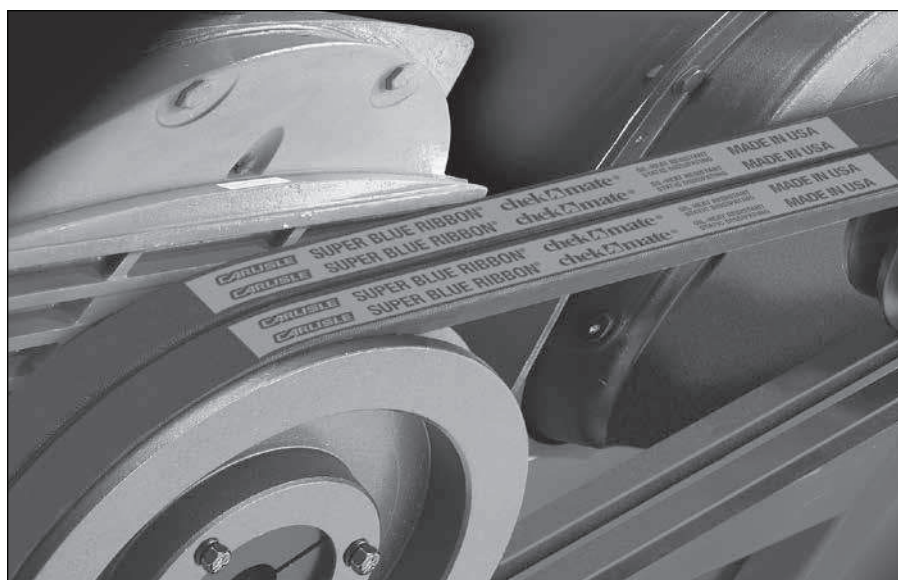

# Super Blue Ribbon® V-Belt

Part Number Example: **CP50** = **C** **P** **50**  
Cross Section      Wrapped Molded Construction      Inside Circumference (inches)

Part Number	Outside Circumference	Weight (lbs)
<b>B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)</b>		
BP224*	227.3	2.25
BP225	228.3	2.26
BP228	231.3	2.30
BP240	241.7	2.41
BP250	251.7	2.52
BP253*	254.7	2.55
BP255	256.7	2.56
BP265	266.7	2.67
BP270	271.7	2.71
BP280	281.7	2.81
BP285	286.7	2.86
BP300	301.7	3.01
BP315	316.7	3.16
BP330	331.7	3.31
BP360	361.7	3.68
BP361*	362.7	3.70
BP364*	365.7	3.80
BP433*	434.7	4.43
BP443*	444.7	4.53
BP512	513.7	5.22
BP543*	544.7	5.53
BP553*	554.7	5.64
<b>C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)</b>		
CP46	50.4	0.79
CP50	54.4	0.91
CP51	55.4	0.98
CP53	57.4	1.01
CP54	58.4	1.04
CP55	59.4	1.06
CP56	60.4	1.01
CP57	61.4	1.04
CP58	62.4	1.00

Part Number	Outside Circumference	Weight (lbs)
<b>C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)</b>		
CP60	64.4	1.15
CP61	65.4	1.16
CP62	66.4	1.18
CP63	67.4	1.20
CP64	68.4	1.22
CP65	69.4	1.10
CP66	70.4	1.25
CP67	71.4	1.27
CP68	72.4	1.29
CP69	73.4	1.30
CP70	74.4	1.27
CP71	75.4	1.34
CP72	76.4	1.36
CP73	77.4	1.38
CP74	78.4	1.40
CP75	79.4	1.46
CP76	80.4	1.49
CP77	81.4	1.50
CP78	82.4	1.52
CP79	83.4	1.54
CP80	84.4	1.55
CP81	85.4	1.58
CP82	86.4	1.59
CP83	87.4	1.61
CP84	88.4	1.63
CP85	89.4	1.65
CP86	90.4	1.67
CP87	91.4	1.69
CP88	92.4	1.71
CP89	93.4	1.73
CP90	94.4	1.74
CP91	95.4	1.76
CP92	96.4	1.79

Heavy Duty V-Belts