

Super Blue Ribbon® V-Belt



1 Cord

The cord is coated with a special compound that produces a secure, long-lasting bond with the surrounding rubber to assure longer life without separation problems. In addition, Blue Ribbon's dependable length stability means the belt requires significantly less re-tensioning and take-up.

2 Cover

The heavy-duty fabric cover not only protects the core; but its extra flexibility permits the belt to bend more easily around the smallest pulleys with far less strain on the fabric. It's a smoother running belt. Longer belt life results in less frequent replacement, less downtime and lower maintenance costs.

PLUS!

The Timken Ironclad Guarantee assures worry-free belt performance!

Recommended Sheaves:
Conventional – QD, Taper Bushed, or MST (A-B, C, D)

The finest wrapped belt in the industry

Super rated at standard prices

Longer life


chekmate®
matching

Applications:

- Mixers
- Pumps
- Conveyors
- HVAC
- Anything and everything & More

Heavy Duty V-Belts

Super Blue Ribbon® V-Belt

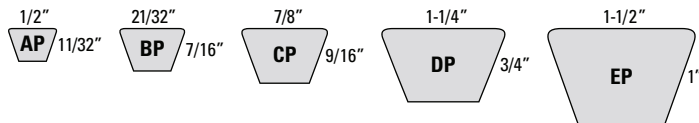


The finest wrapped belt in the industry and workhorse of classical v-belts.

Heavy-Duty Cover – Stress-relieved fabric cover flexes better than ordinary fabric to improve belt life, and assures a smooth transfer of power.

Super Blue's resistance to oil, heat, weather and aggressive environmental conditions is outstanding.

Super Blue Ribbon® v-belts operate within a wide range of load capacities and speeds – with rated performance from 100 to 8,000 RPM and horsepower capability from 1 to 1,100 horsepower.

Super Blue Ribbon is the ideal choice for dependable performance on an extremely wide range of applications – A, B, C, D, and E sections – single or multiple drive.

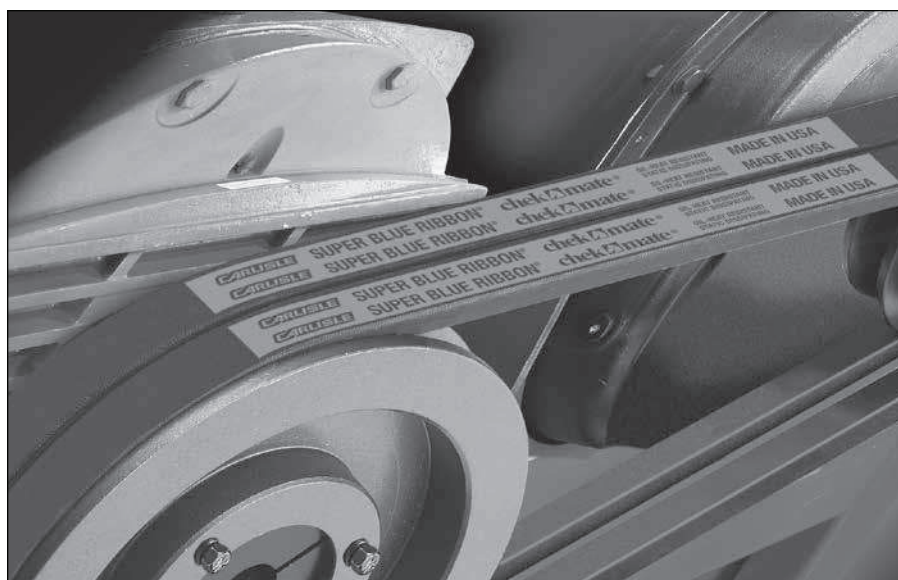

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® Part Numbers

Part Number	Outside Circumference	Weight (lbs)
C Section – Recommended Sheaves: Conventional – OD, Taper Bushed, or MST (C)		
CP93	97.4	1.81
CP94	98.4	1.82
CP95	99.4	1.84
CP96	100.4	1.86
CP97	101.4	1.88
CP98	102.4	1.90
CP99	103.4	1.92
CP100	104.4	1.94
CP101	105.4	1.96
CP102	106.4	1.97
CP103	107.4	1.99
CP104	108.4	2.01
CP105	109.4	2.03
CP106	110.4	2.04
CP107	111.4	2.07
CP108	112.4	2.09
CP109	113.4	2.10
CP110	114.4	2.12
CP111	115.4	2.14
CP112	116.4	2.16
CP113	117.4	2.18
CP114	118.4	2.20
CP115	119.4	2.22
CP116	120.4	2.23
CP117	121.4	2.25
CP118	122.4	2.27
CP119	123.4	2.29
CP120	124.4	2.31
CP121	125.4	2.33
CP122	126.4	2.34
CP123	127.4	2.37
CP124	128.4	2.38
CP125	129.4	2.40

Part Number	Outside Circumference	Weight (lbs)
C Section – Recommended Sheaves: Conventional – OD, Taper Bushed, or MST (C)		
CP126	130.4	2.42
CP127	131.4	2.44
CP128	132.4	2.46
CP129	133.4	2.48
CP130	134.4	2.50
CP131	135.4	2.52
CP132	136.4	2.53
CP133	137.4	2.55
CP134	138.4	2.57
CP135	139.4	2.59
CP136	140.4	2.61
CP137	141.4	2.63
CP138	142.4	2.66
CP139	143.4	2.57
CP140	144.4	2.68
CP141	145.4	2.70
CP142	146.4	2.72
CP143	147.4	2.74
CP144	148.4	2.76
CP145	149.4	2.78
CP146	150.4	2.80
CP147	151.4	2.81
CP148	152.4	2.83
CP149	153.4	2.85
CP150	154.4	2.87
CP151	155.4	2.89
CP152	156.4	2.91
CP153	157.4	2.93
CP154	158.4	2.95
CP155	159.4	2.97
CP156	160.4	2.98
CP157	161.4	3.00
CP158	162.4	3.02